

# VACON NXL THE EASY AND IMPRESSIVE AC DRIVE



#### EASY TO PLUG, AND EASIEST TO PLAY

The Vacon NXL is a powerful and compact AC drive for industrial and residential purposes in the power range from 0.25 to 30 kW. The space-saving bookshelf design with high protection classes, versatile control and programming capabilities offer an optimal solution for all operating environments. Installation, connection and commissioning procedures are extremely quick and convenient with instructions attached to the unit.

Thanks to an extremely effective design, everything is included as standard. The units can be installed on the wall without additional cabinets because of high protection classes. The RFI filters and brake choppers are always integrated. The standard units fit almost everywhere in both industrial and residential areas. The integrated choke reduces the stress on supply transformers, cables and fuses.

Convenient installation and programming

The installation and programming is extremely quick and convenient with the help of the credit-card-size Quick Guide. The programming is often just a selection of load type and fine-tuning of the motor nominal current and speed.

Although the Vacon NXL is simple in construction compared to other Vacon NX ranges, it is the most flexible drive in its class. The flexibility means a wide range of control possibilities, programmable features, installation possibilities and modularity. The easy-to-use PC tools can be used e.g. for programming and parameter copying. Sometimes it is possible to remove the PLC from the system by adding logic to the drive with the NC61131-3 PC tool.

The double rating of the Vacon NXL and dynamic open loop vector control make the NXL a perfect choice for all kinds of loads, from simple pumps and fans to demanding material handling applications.

The motor noise level is extremely low because of a high switching frequency and a near-sinusoidal current waveform.

#### More features, more performance

- No additional cabinets required
- Everything integrated as standard (dust/water protection, RFI filter, AC choke, brake chopper)
- Easy to install, easy to use
- Low noise (both drive and motor)
- Large amount of control possibilities (via I/Os, field buses or display panel)
- Large amount of features (e.g. fully programmable I/O, auto-identification, PID controller, flying start)
- High performance

## VACON NXL MF4-MF6, IP21







#### VACON NXL MF4-MF6, IP54








#### DESIGN & DIMENSIONS

The mechanical design is extremely compact. The IP54 units in particular are the smallest AC drives on the market. All units are suitable for both wall and enclosure mounting with all necessary components: integrated EMC filters, AC chokes, cable protection, dust and water protection. The effective super-cooling principle allows high ambient temperatures and high switching frequencies without derating.

	Motor nominal values								
Voltage U (V)	Power High overload P <sub>H</sub> (kW)	Power Low overload P <sub>L</sub> (kW)							
400	0.754	1.15.5							
500	1.15.5	1.57.5							
400	5.511	7.515							
500	7.515	1118.5							
400	1522	18.530							
500	18.530	2237							

	Vacon NXL features									
Supply voltage U (V)	EMC	Enclosure	Dimensions W x H x D (mm)	Weight (kg)	Integrated brake chopper	Integrated AC choke	Mechanical frame size			
380500	H/T, C	IP21/IP54	128 x 292 x 190	5	standard	standard	MF4			
380500	H/T, C	IP21/IP54	128 x 292 x 190	5	standard	standard	MF4			
380500	H/T, C	IP21/IP54	144 x 391 x 214	8.1	standard	standard	MF5			
380500	H/T, C	IP21/IP54	144 x 391 x 214	8.1	standard	standard	MF5			
380500	H/T, C	IP21/IP54	195 x 519 x 237	18.5	standard	standard	MF6			
380500	H/T, C	IP21/IP54	195 x 519 x 237	18.5	standard	standard	MF6			

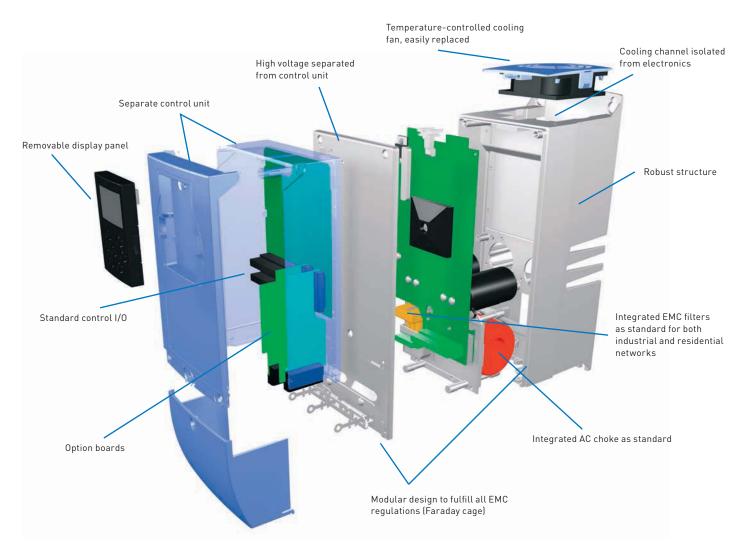

#### MF4-MF6 PRODUCT RANGE

Mains voltage 380-500 V, 50/60 Hz, 3~, enclosure class IP21/IP54, EMC level H


					Loadability	Motor sh	aft power			
			Lov	v	Higl	h		400 V supply		
А	C drive	type *	Rated continuous current I L (A)	10% overload current (A)	Rated continuous current I <sub>H</sub> (A)	50% overload current (A)	Maximum current I <sub>S</sub>	10% overload 40°C P (kW)	50% overload 50°C P(kW)	Frame size
NXL	0003	5 C 2 H 1	3.3	3.6	2.2	3.3	4.4	1.1	0.75	MF4
NXL	0004	5 C 2 H 1	4.3	4.7	3.3	5.0	6.2	1.5	1.1	MF4
NXL	0005	5 C 2 H 1	5.6	6.2	4.3	6.5	8.6	2.2	1.5	MF4
NXL	0007	5 C 2 H 1	7.6	8.4	5.6	8.4	10.8	3	2.2	MF4
NXL	0009	5 C 2 H 1	9	9.9	7.6	11.4	14	4	3	MF4
NXL	0012	5 C 2 H 1	12	13.2	9	13.5	18	5.5	4	MF4
NXL	0016	5 C 2 H 1	16	17.6	12	18.0	24	7.5	5,5	MF5
NXL	0023	5 C 2 H 1	23	25.3	16	24.0	32	11	7,5	MF5
NXL	0031	5 C 2 H 1	31	34	23	35	46	15	11	MF5
NXL	0038	5 C 2 H 1	38	42	31	47	62	18.5	15	MF6
NXL	0046	5 C 2 H 1	46	51	38	57	76	22	18.5	MF6
NXL	0061	5 C 2 H 1	61	67	46	69	92	30	22	MF6

<sup>\*</sup> Type code of the IP21 unit. The type code of the IP54 unit: replace '2' with '5'; for example, NXL 0003 5C5H1

For all Vacon NXL drives, overloadability is defined as follows:

High:  $1.5 \times I_H$  (1 min/10 min) at 50°C; Low:  $1.1 \times I_L$  (1 min/10 min) at 40°C;  $I_S$  for 2 seconds every 20 seconds.

#### VACON NXL MF4-MF6 TYPE DESIGNATION CODE

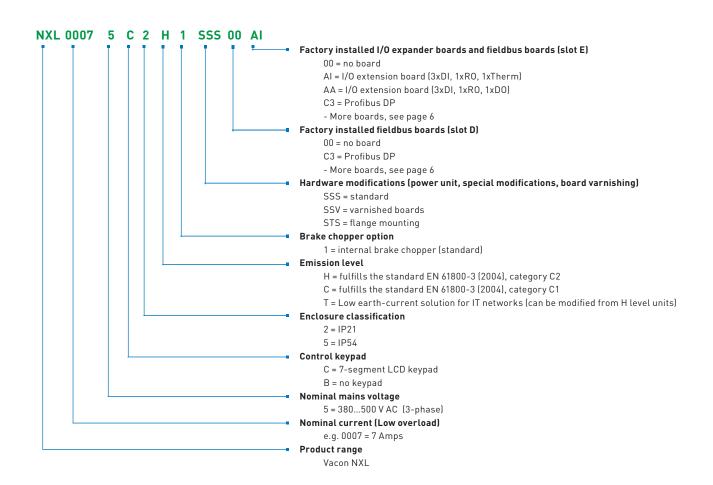

#### COMPACT YET SO POWERFUL

The Vacon NXL range also offers compact, cabinet-mounted units for lower motor powers. Frames MF2 and MF3 are suitable for both 208–230 V and 380–500 V supply voltages for powers up to 2.2 kW. The compact size and flexible installation options make the Vacon NXL suitable for installations where space is at a premium. The standard control I/O can be extended with one I/O expander board or one fieldbus board.

#### **Features**

- Small size
- Flexible installation (back or side, screw or DIN rail)
- Easy to install and use
- Low noise
- Large amount of control possibilities (via I/Os, fieldbuses or display panel)
- Large amount of features (e.g. fully programmable I/O, auto-identification, PID controller, flying start)
- High performance
- RFI filters and AC chokes available as options



#### Mains voltage 380-500 V, 50/60 Hz, 3~, enclosure class IP20, EMC level N

			Loadability	Motor sh	aft power			
	Low		Hig	h		400 V	supply	
AC drive type	Rated continuous current I L (A)	10% overload current (A)	Rated continuous current I <sub>H</sub> (A)	50% overload current (A)	Maximum current I <sub>S</sub>	10% overload 40°C P (kW)	50% overload 50°C P(kW)	Frame size and dimensions (W x H x D)
NXL 0001 5 C 1 N 0	1.9	2.1	1.3	2.0	2.6	0.55	0.37	MF2 / 60 x 130 x 150
NXL 0002 5 C 1 N 0	2.4	2.6	1.9	2.9	3.8	0.75	0.55	MF2 / 60 x 130 x 150
NXL 0003 5 C 1 N 1	3.3	3.6	2.4	3.6	4.8	1.1	0.75	MF3 / 84 x 220 x 172
NXL 0004 5 C 1 N 1	4.3	4.7	3.3	5.0	6.6	1.5	1.1	MF3 / 84 x 220 x 172
NXL 0005 5 C 1 N 1	5.4	5.9	4.3	6.5	8.6	2.2	1.5	MF3 / 84 x 220 x 172

#### Mains voltage 208-240 V, 50/60 Hz, 1/3~ (3~ motor), enclosure class IP20, EMC level N

			Loadability	Motor sh	aft power			
	Low		High			230 V supply		
AC drive type	Rated continuous current I L (A)	10% overload current (A)	Rated continuous current I <sub>H</sub> (A)	50% overload current (A)	Maximum current I <sub>S</sub>	10% overload 40°C P(kW)	50% overload 50°C P(kW)	Frame size and dimensions (W x H x D)
NXL 0002 2 C 1 N 0*	2.4	2.6	1.7	2.6	3.4	0.37	0.25	MF2 / 60 x 130 x 150
NXL 0003 2 C 1 N 1	3.7	4.1	2.8	4.2	5.6	0.75	0.55	MF3 / 84 x 220 x 172
NXL 0004 2 C 1 N 1	4.8	5.3	3.7	5.6	7.4	1.1	0.75	MF3 / 84 x 220 x 172
NXL 0006 2 C 1 N 1	6.6	7.2	4.8	7.2	9.6	1.5	1.1	MF3 / 84 x 220 x 172

 $<sup>{\</sup>color{blue}*} \ \text{suitable only for single-phase supply voltage (the rest suitable for both single-phase and three-phase supply voltages)}$ 


#### VACON NXL CONTROL UNIT

The standard I/O of the Vacon NXL has been optimized for typical control requirements. In addition to digital and analog inputs and outputs, RS485 (Modbus RTU) is included as standard. All inputs and outputs of the standard I/O and option boards are freely programmable. Both Analog Inputs can be programmed for 0...10 V or 0(4)...20 mA signals. Analog Input can also be programmed as Digital Input.

The standard I/O can easily and cost-effectively be extended with OPT-AA or OPT-AI boards, if necessary. The OPT-AA is the most effective way to add one more Relay Output, and the OPT-AI is normally used when galvanically isolated motor thermistor connection is needed. These boards are installed in option board slot E.

It is also possible to control the Vacon NXL with various kinds of fieldbuses with OPT-C-type boards (see the table below). The I/O extension and fieldbus boards are the same for all Vacon NX products. The fieldbus boards can be installed in slot D or E.

There are a large number of OPT-B-type option boards available. The most typical boards are included in the table below. It is possible, for instance, to add three more output relays with OPT-B5, if necessary. The OPT-B-type boards are typically installed in slot E.

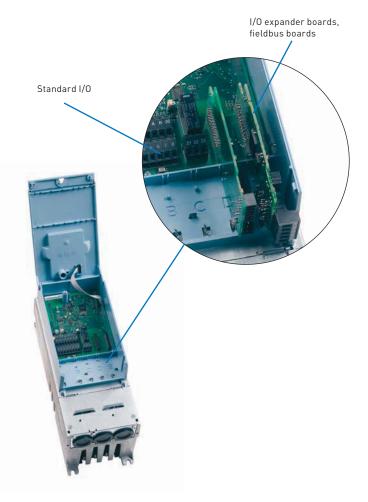

#### **VACON NXL OPTION BOARDS**

Card typecode	Sl	ot		I/O signal							
	D	E	DI	DO	AI mA isol.	AO mA isol.	RO NO NC	RO NO	Therm	+24 EXT +24V	NOTE
Basic I/O cards	(OP1	Г-А)									
OPT-AA			3	1			1				
OPT-AI			3					1	1		
I/O expander ca	rds	(0P	Γ-B), typic	al							
OPT-B2							1	1	1		
OPT-B4					1	2				1	analog signals galvanically isolated separately
OPT-B5								3			
Fieldbus cards (	ОРТ	-c)									
OPT-C2			RS-485 (I	Multiproto	col)						N2 (Modbus as standard)
OPT-C3			Profibus	DP							
OPT-C4			LonWork	S							
OPT-C5			Profibus	DP (D9 typ	e connecto	r)					
OPT-C6			CANoper	CANopen (slave)							
OPT-C7			DeviceNe	DeviceNet							
OPT-C8			RS-485 (I	Multiproto	col, D9 typ	e connecto	r)				N2 (Modbus as standard)
OPT-CI			Modbus/	Modbus/TCP (Ethernet)							
OPT-CJ			BACnet								

NOTES: Allowed slots for the board are marked in blue. Allowed option board combinations are as follows: no boards, 1x0PT-Ax, 1x0PT-Bx, 1x0PT-Cx, or 1x0PT-Ax and 1x0PT-Cx.

## VACON NXL CONTROL I/O

#### Standard I/O

	Otaniaan a 17 O					
K	Ter	minal	Signal, default settings			
	1	+10V	Reference voltage			
110 kΩ	2	AI1+	Analog input, 0–10 V (0/4–20 mA)			
110 K32	3	AI1-	Al common			
	4	AI2+	Analog input, 0/4–20 mA (0–10 V)			
	5	A12-	Al common			
	6	+24V	24V auxiliary voltage			
	7	GND	I/O ground			
	8	DIN1	Start forward			
<b>/</b>	9	DIN2	Start reverse			
_/	10	DIN3	Preset speed 1			
	11	GND	I/O ground			
(mA)	18	A01+	Analog output, output frequency			
(IIIA)	19	A01-	A0 common			
	Α	RS485	Serial bus (Modbus RTU)			
	В	RS485	Serial bus			
	30	+24V	External control voltage supply			
	21	R01	Relay output 1, FAULT			
	22	R01				
	23	R01				

All inputs and outputs of the standard I/O and option boards are freely programmable.

#### OPT-AA (typical option)

Ter	minal	Signal, default settings					
1	+24V	24 V auxiliary voltage					
2	GND	I/O ground					
3	DIN1	Preset speed 2					
4	DIN2	Fault reset					
5	DIN3	Disable PID					
6	D01	Digital output, Ready					
24	R01	Relay output 1, RUN					
25	R01						
26	R01						

#### OPT-AI (typical option)


Ter	minal	Signal, default settings
12	+24V	24 V auxiliary voltage
13	GND	I/O ground
14	DIN1	Preset speed 2
15	DIN2	Fault reset
16	DIN3	Disable PID
25	R01	Relay output 1, RUN
26	R01	
28	TI1+	Thermistor input
29	TI1-	(galvanically isolated)

#### OTHER TYPICAL OPTIONS

OPTION	ORDER TYPECODE	SUITABILITY	NOTE
IP54 enclosure	Factory option	MF4-MF6	Replace '2' by '5' in the type code, e.g. NXL00315C <b>5</b> H1 (SSS)
	IP5-FR_	MF4-MF6	IP54 kit, e.g. IP5-FR4
Through-hole mounting	Factory option	MF4-MF6	E.g. NXL00315CTH1STS, IP54 back, IP21 front, kits available
External brake resistors	BRR-0022-LD-5	00035-00225	LD = Light Duty: 5 sec nominal torque braking from
	BRR-0031-LD-5	00315	nominal speed decreasing linearily to zero, once per 120 sec.
	BRR-0045-LD-5	00385-00465	HD = Heavy Duty: 3 sec nominal torque braking at nominal speed + 7 sec nominal torque braking from nominal
	BRR-0061-LD-5	00615	speed decreasing linearily to zero, once per 120 sec. Replace LD by HD in the type code, e.g. BRR-0031- <b>HD</b> -5 The brake resistor manual is available for more precise selection
Panel door installation sets	DRA-02L DRA-04L	All	Door installation set with a 2-m RS232C cable Door installation set with a 4-m RS232C cable
PC adapter	PAN-RS	All	Adapter PAN-RS and a RS232C cable are required for PC connection
RS232C cables	RS232C-2M RS232C-4M	All	2-meter-long RS232C cable for PC connection 4-meter-long RS232C cable for PC connection
Varnished circuit boards	Factory option	MF4-MF6	Replace the 'S' by 'V', e.g. NXL00315C5H1SS <b>V</b>
C-level RFI filters	Factory option	MF4-MF6	Replace 'H' by 'C' in the typecode, e.g. NXL00315C2 <b>c</b> 1 (SSS)
OPTIONS FOR COMPACT UNI	TS (MF2-MF3)		
RFI filters	RFI-0012-2-1	00022-00062	RFI filter for 208-230 V units, H level, 1~ supply
	RFI-0013-2-1	00022-00062	RFI filter for 208-230 V units, H level, 1~ supply, footprint installation
	RFI-0008-5-1	00015-00055	RFI filter for 380-500 V units, H level, footprint installation
DIN rail installation	Factory option	MF2-MF3	Replace 'S' by 'D' in the typecode, e.g. NXL 00025C1H0 S <b>D</b> S

#### FIRST-CLASS USABILITY

The basic settings can be programmed by simply launching the Vacon NXL start-up wizard. Only four steps are required, and the drive is ready to run.

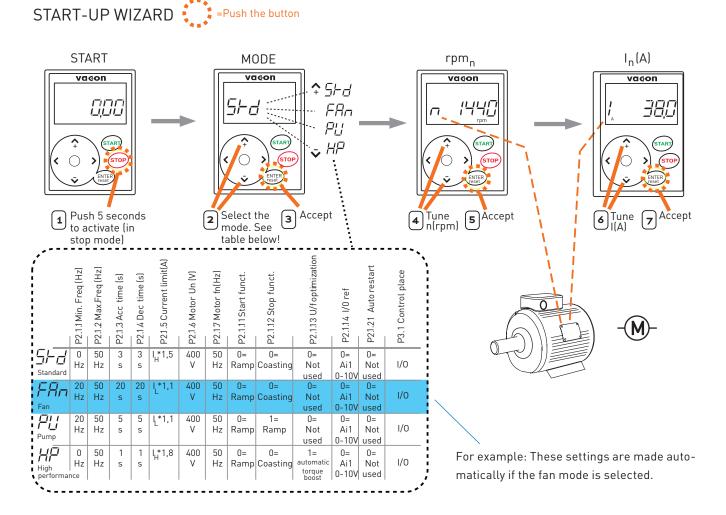



#### MULTI-CONTROL APPLICATION

The standard Multi-Control Application software of the Vacon NXL is extremely flexible and easy to use. All inputs and outputs are programmable, and there is a full set of features and possibilities for system or process control and protections.

The default settings are very close to optimum, and the drive operates accurately enough without any programming. It still is recommended to check and fine-tune the motor nominal values to optimize the performance and motor protection. Programming can be made simply by using the start-up wizard feature of the display panel, programming parameter by parameter with display panel, or programming by the NCDrive tool. The instructions, if required, can be found in the credit-card-size Quick Guide.

There are many parameters and features which can be utilized, if necessary. For example:

- PID controller
- Pump and fan control for a maximum of 4 parallel motors
- Flying start
- Auto-tuning
- Programming of all control inputs and outputs
- Output relay delays


In addition to the standard MultiControl Application software, some special application software is also available. It is even possible to make totally customer-specific software with the NC61131-3 Engineering tool, and remove the PLC by integrating the logic to the NXL software.

The Vacon PC tools are available for downloading from the Vacon website at http://www.vacon.com. These include:

- Vacon NCDrive for parameter setting, copying, storing, printing, monitoring and controlling
- Vacon NCLoad for software updating and uploading special software to the drive
- Vacon NC61131-3 Engineering is available for making tailor-made software. (A license key and training required)

The following software applications are available for special requirements:

- Brake control
- Lift
- Multi-motor
- Sliding door
- Local/remote
- Fire mode
- Multi-purpose

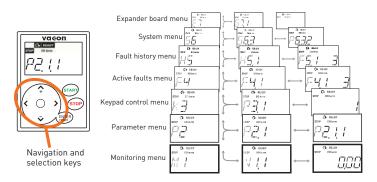


Navigating the menu structure (e.g. special parameters, monitoring signals)



Activating the start-up wizard

#### **EMC AND INSTALLATION ENVIRONMENT**

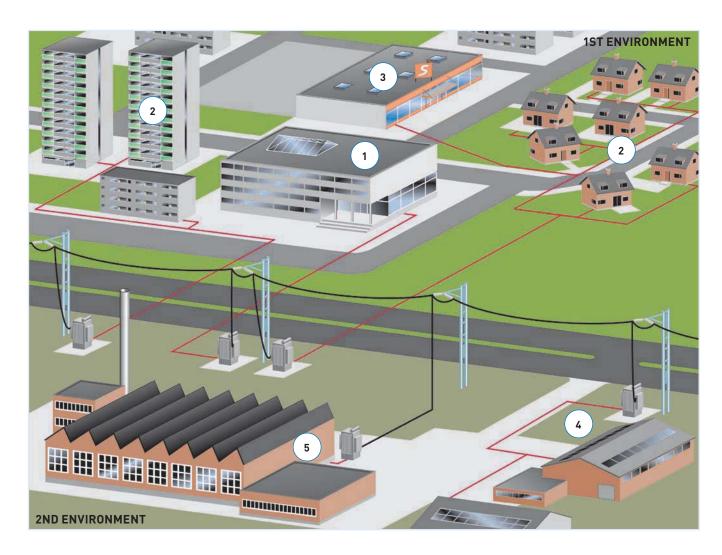

The product family standard EN61800-3 sets limits for both emissions and immunity of radio frequency disturbances. The environment has been divided into the 1st and 2nd environments, which, in practice, means public and industrial networks.

Radio Frequency Interference (RFI) filters are typically required to meet the EN61800-3 standard. These filters are integrated in the Vacon NXL MF4-MF6 as standard.

The Vacon NXL fulfills all the requirements of the 1st and 2nd environments (H level: EN61800-3 (2004), category C2). No additional RFI filters or cabinets are required for frames MF4-MF6.

The Vacon NXL MF4-MF6 units are also available with extremely low-emission integrated EMC filters (C level: EN61800-3 (2004), category C1; EN55011, class B). These filters are sometimes required in very sensitive locations such as hospitals.

#### EMC Selection Table, restricted distribution

(1)

2

3

4

5

			$\sim$			
Vacon NXL EMC	Hospital	Residential Area	Commercial	Light Industry Area	Heavy Industry	Marine
С	0					
Н	R	R	R	0	0	
L				R	R	
T					R (IT Network)	R (IT Network)

R = Required ; O = Optional

## **TECHNICAL DATA**

Mains	Input voltage U <sub>in</sub>		380500 V, -10%+10%, 208240 V, -10%+10%		
connection	Input frequency		4566 Hz		
	Connection to mains		Once per minute or less (normal case)		
Motor	Output voltage		0U <sub>in</sub>		
connection	Continuous output current		High overloadability: I <sub>H</sub> , ambient temperature max. +50°C		
			Low overloadability: I <sub>L</sub> , ambient temperature max. +40°C		
	Overloadability		High: 1.5 x I <sub>H</sub> (1 min/10 min), Low: 1.1 x I <sub>L</sub> (1 min/10 min)		
	Max. starting current		I <sub>s</sub> for 2 s every 20 s		
	Output frequency		0320 Hz		
	Frequency resolution		0.01 Hz		
Control	Control method		Frequency control U/f; Open Loop Vector Control		
characteristics	Switching frequency		116 kHz; Factory default 6 kHz, (MF2, MF3: default 3,6 kHz)		
	Field weakening point		8320 Hz		
	Acceleration time		03000 s		
	Deceleration time		03000 s		
	Braking		DC brake: 30% * T <sub>N</sub> (without brake resistor), flux braking		
Ambient conditions	Ambient operating tempera	ature	-10°C (no frost)+50°C: I <sub>H</sub>		
			-10°C (no frost)+40°C: IL		
	Storage temperature		-40°C+70°C		
	Relative humidity		0 to 95% RH, non-condensing, non-corrosive, no dripping water		
	Air quality: - chemical vapours		IFO 701 2 2 with a promise place 202		
	- mechanical particles		IEC 721-3-3, unit in operation, class 3C2 IEC 721-3-3, unit in operation, class 3S2		
	Altitude		100% load capacity (no derating) up to 1000 m		
			1% derating for each 100 m above 1000 m; max. 3000 m		
	Vibration		5150 Hz		
	EN50178/EN60068-2-6		Displacement amplitude 1 mm (peak) at 315.8 Hz Max acceleration amplitude 1 G at 15.8150 Hz		
	Shock		UPS Drop Test (for applicable UPS weights)		
	EN50178, EN60068-2-27		Storage and shipping: max 15 G, 11 ms (in package)		
	Enclosure class		MF4-MF6: IP21 and IP54; MF2-MF3: IP20		
EMC	Immunity	Fulfills all EMC immu	inity requirements		
	Emissions	EMC level C: EN61800	0-3 (2004), category C2; EN61000-6-4, EN50081-2; EN55011 class A 0-3 (2004), category C1; EN61000-6-3, EN50081-1,-2; EN55011 class B th-current solution suitable for IT networks (can be modified from H-level units)		
			0-3 (2004), category C4 <b>Iter</b> : EN61800-3 (2004), category C2; EN61000-6-4, EN50081-2; EN55011 class A.		
Safety			0204-1 (1996), EN 60950 (2000, 3rd edition) (as relevant), CUL; (see unit nameplate for more detailed approvals)		
Control	Analogue input voltage		resolution 0.1%, accuracy ±1%		
connections	Analogue input current	0(4)20 mA, R <sub>i</sub> = 250	$\Omega$ differential, resolution 0.1%, accuracy ±1%		
(values in brackets valid for OPT-AA or	Digital inputs	3 (6), 1830 VDC			
OPT-AI)	Auxiliary voltage	+24 V, ±15 %, max. 25	0mA (MF2-MF3: 100mA)		
	Output reference voltage	+10 V, +3%, max. load			
	Analogue output	0(4)20 mA; R <sub>L</sub> max.	500 $\Omega$ , resolution 10 bit, accuracy ±2%		
	Relay outputs	1 (2) programmable r Switching capacity: 2	elay output(s) 4 VDC/8 A, 250 VAC/8 A, 125 VDC/0.4 A. Min. switching load: 5 V/10 mA		
	RS-485	Serial bus (Modbus R	TU)		
	Thermistor input	Galvanically isolated,	$R_{trip} = 4.7 \text{ k}\Omega \text{ (OPT-AI)}$		
Protections		_	oltage, earth fault, motor phase supervision, overcurrent, unit overtemperature, or stall, motor underload, short-circuit of +24 V and +10 V reference voltages		

### www.vacon.com



