
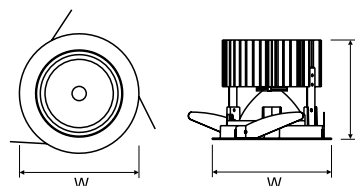


Group in catalogue: DOWNLIGHT LUMINAIRES

LUGSTAR PREMIUM LED

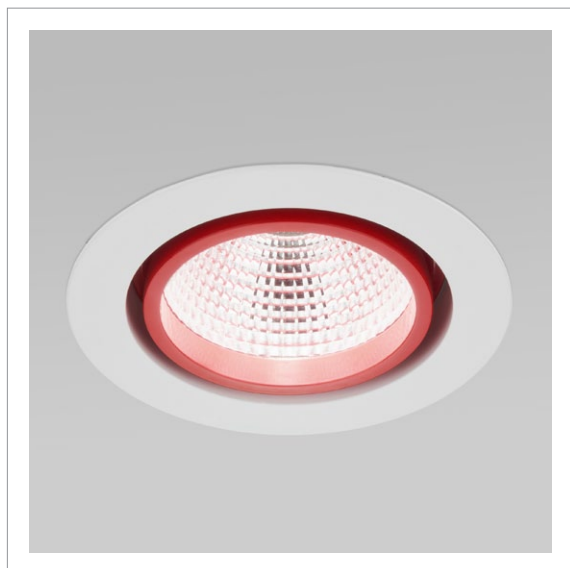


Code	Emergency kit	Lumen LED [lm] ¹⁾	Lumen luminaire [lm] ¹⁾	Color temperature [K]	Colour Rendering Index [CRI]	Power LED [W]	Luminaire power [W]	Wymiary [mm] W H	Wymiary montażowe [mm] W	Weight [kg]
IP20										
030241.5L01.3XX	+	1500	1250	3000	>80	12	13	192 115	170	1,5
030241.5L02.3XX	+	1500	1250	4000	>80	12	13	192 115	170	1,5
030241.5L03.3XX	+	2000	1600	3000	>80	18	20	192 115	170	1,5
030241.5L04.3XX	+	2000	1600	4000	>80	18	20	192 115	170	1,5
030241.5L05.3XX	+	3000	2500	3000	>80	26	29	192 115	170	1,5
030241.5L06.3XX	+	3000	2500	4000	>80	26	29	192 115	170	1,5
030241.5L07.3XX	²⁾	5000	4100	3000	>80	43	48	192 160	170	2,0
030241.5L08.3XX	²⁾	5000	4100	4000	>80	43	48	192 160	170	2,0
IP44										
030261.5L01.3XX	+	1500	1200	3000	>80	12	13	192 115	170	1,5
030261.5L02.3XX	+	1500	1200	4000	>80	12	13	192 115	170	1,5
030261.5L03.3XX	+	2000	1600	3000	>80	18	20	192 115	170	1,5
030261.5L04.3XX	+	2000	1600	4000	>80	18	20	192 115	170	1,5
030261.5L05.3XX	+	3000	2400	3000	>80	26	29	192 115	170	1,5
030261.5L06.3XX	+	3000	2400	4000	>80	26	29	192 115	170	1,5
030261.5L07.3XX	²⁾	5000	4000	3000	>80	43	48	192 162	170	2,0
030261.5L08.3XX	²⁾	5000	4000	4000	>80	43	48	192 162	170	2,0

¹⁾ Luminous flux tolerance + / - 10%²⁾ Please contact LUG technical dept. for information on combining the solutions as listed above

030241.5L01.3

- Ring colour
- 1  white
 - 3  black
 - 4  red
 - 5  blue
 - 6  green
- Beam angle
- 1 36°
 - 2 76°

Available versions

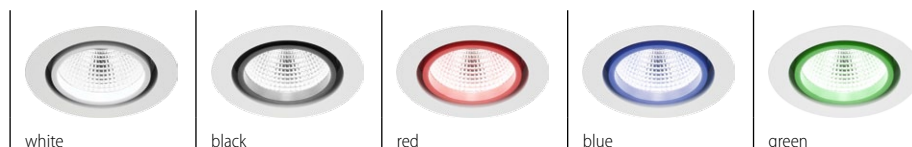

white

black

red

blue

green

Group in catalogue: DOWNLIGHT LUMINAIRES

LUGSTAR PREMIUM LED

DESCRIPTION:

decorative downlight luminaire for suspended ceilings, degree of water and dust-proof IP20 and IP44, for LED light sources

TECHNICAL DATA

Body: aluminum

Colour: white

Way of mounting: in the ceiling with mounting brackets (included)

ELECTRICAL DATA

Type of equipment: LED driver

Including light source: yes

OPTICAL DATA


Beam angle: 36°, 76°

ADDITIONAL INFO

Additionally available: DALI, emergency kit LED

Other remarks: Flux of luminaire depends of the colour of the luminaire ring; claimed flux is appropriate for downlight luminaire in colour RAL9003

Application: shop sales halls, chopping centers, museums, galleries, exhibitions, expositions, offices, hotels, conference centers, public utility buildings

Accessories

150100.00518 Mounting plate