


TECHNICAL DATA SHEET ART. S.6260W - SKILL SQUARE

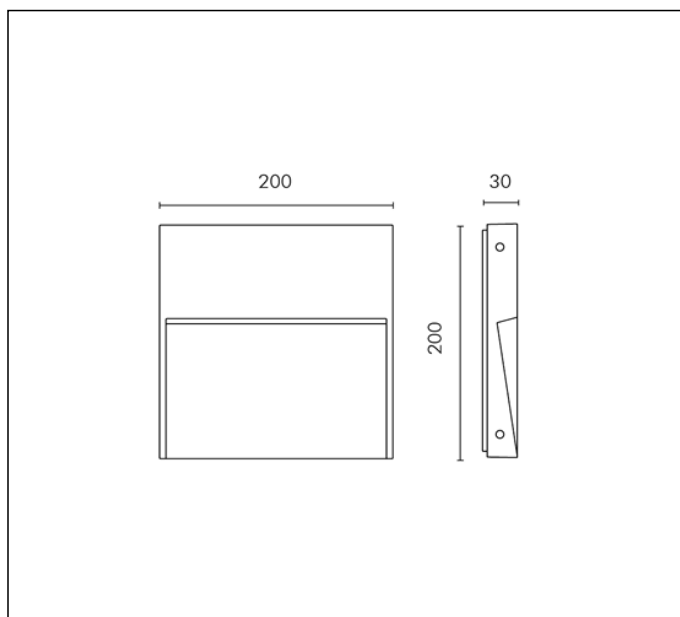


MODULES LED 3000K 230V 1008lm CRI 90 MacAdam step 3

Rated luminaire luminous flux: 417lm

Rated input power: 12.5W

Luminaire efficacy: 33lm/W

Electronic ballast 220÷240V 0/50/60Hz



PRODUCT TYPE

Wall mounted luminaire . IP rating IP 65

MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 (low copper content) with high resistance against corrosion. Stone wash surface treatment prior to painting process. A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion. Silicone gaskets. Painting Process : 3 Step Process

1) Surface treatment with BONDERITE. A heavy metal free chemical surface treatment containing ceramic nano particles giving a cohesive, inorganic and highly dense protective coating. 2) PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. 3) POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Improved protection for Marine applications. Mechanical resistance of glass IK 08

LIGHTING PERFORMANCE

Toughened glass diffuser. LOR --

WIRING

MINISKILL is supplied with a pre-wired 1m H05RN-F cable. SKILL is supplied with single cable entry. Isolation: CLASS I . Available colours: White (cod.01), Aluminium grey (cod.14). Weight: 1.2 Kg Glow Wire test: --

L.E.D circuit included.

This luminaire contains built-in LED modules with energy class: A, A+, A++. The LED modules cannot be changed in the luminaire (Regulation UE 874/2012).

LED circuit boards are engineered accordingly to actual Lumen Maintenance regulation (LM80) and Technical Memorandum (TM21) where uniformity and quality of light is 50.000 hours referred to L70 B20 Ta 25°C.

Lifecycle refers to LED circuit boards only, all others components of the luminaire are excluded.

EMERGENCY VERSIONS

The fittings operates both on AC (50/60Hz) and DC (0Hz) voltage.

TECHNICAL DATA SHEET ART. S.6260W - SKILL SQUARE ACCESSORIES



**S.6249
ACCESSORY FIXING KIT**
Kit for INSTALLATION SKILL FLUSH SQUARE, ROUND
and RECTANGULAR. Extractor tools included.



**S.6269
RECESSED BOX**
for SKILL / ZEN SQUARE FLUSH
(suitable for fair faced concrete applications)
Dim. 217mm x 217mm x 70mm
Attention:
Required S.6249 ACCESSORY FIXING KIT to install
SKILL luminaires on its S.6269 RECESSED BOX