



Customer Art.-No.: .

Manufacturer: GLAMOX Production

Article-No.: 1445301206

## Description

|                        |                                         |                      |    |
|------------------------|-----------------------------------------|----------------------|----|
| Type of luminaire:     | 1445 2200 840 220-240 IP66/67 M24 MB TW |                      |    |
| Categorie:             | Luminaire; surface                      | Fire prot. class:    |    |
| Protection degree:     | IP 6667                                 | Colour of reflector: |    |
| Body Material / Frame: | Zinc Coated Steel                       | Reflector Material:  |    |
| Colour of Body:        | White                                   | Colour of ring:      |    |
| Colour Code of Body:   | RAL 9016                                | Cable length:        | m  |
| Diffuser Material:     | Polycarbonate                           | Connection:          |    |
| Material Endcap:       |                                         | Optic:               | CL |
| Mounting:              | VG08                                    | Visibility:          | nm |
| Ignition class:        |                                         | Angle of visibility: | °  |
| Approval:              |                                         |                      |    |

## Electrical Data

|                           |               |                               |       |                         |                |
|---------------------------|---------------|-------------------------------|-------|-------------------------|----------------|
| <b>Number of lamps:</b>   |               | <b>Power of lamp:</b>         | W     | <b>Voltage:</b>         | 220-240V ± 10% |
| <b>Number of lamps 2:</b> |               | <b>Power of lamp 2:</b>       | W     | <b>Mains Current:</b>   | 0.105 A        |
| <b>Frequency:</b>         | 50/60Hz       | <b>Total consumption:</b>     | 20W   | <b>Compensation:</b>    |                |
| <b>Light source:</b>      | LED White     | <b>Socket:</b>                |       | <b>Through wiring:</b>  | 3-pole         |
| <b>Light source 2:</b>    |               | <b>TA min.:</b>               | -25°C | <b>Dimming-operat.:</b> |                |
| <b>Power factor:</b>      | cos phi >0.85 | <b>TA max.:</b>               | +50°C | <b>Lamp code 2:</b>     |                |
| <b>Lamp(s) included:</b>  | YES           | <b>Rated system lifetime:</b> | h     | <b>Lamp code:</b>       | 840            |
| <b>Battery backup:</b>    |               | <b>Termination:</b>           |       | <b>Lumen Out 2:</b>     | lm             |
|                           |               | <b>EM-Type:</b>               |       | <b>Lumen Out:</b>       | 2 437 lm       |

## Remarks

VC08 Cable entry: -O- 2xM24x1.5 brass D10-12.5mm MGCG  
 VG08 Housing with brackets;cranked and welded;zinc coated steel  
 VI01 Through wiring 3-pole

## Picture






Customer Art.-No.: .

Manufacturer: GLAMOX Production

Article-No.: 1445301206


### Dimensions

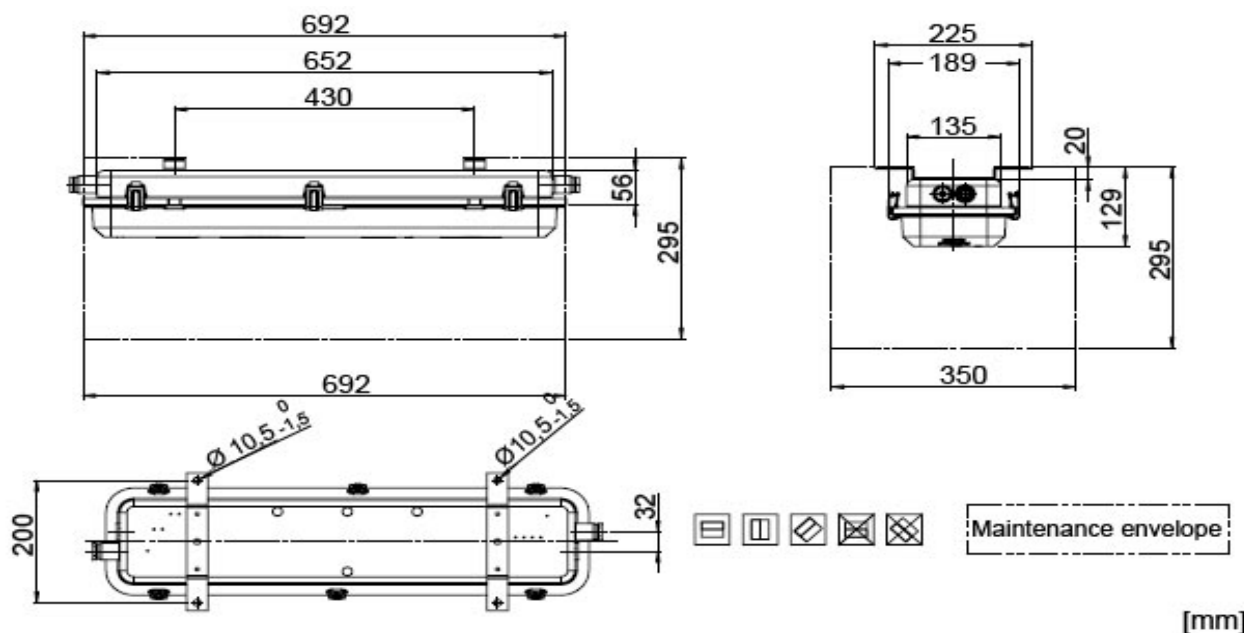

|                   |    |                     |        |               |               |
|-------------------|----|---------------------|--------|---------------|---------------|
| Cut out length:   | mm | Luminaire length:   | 692 mm | Gross weight: | Appr. 4,60 kg |
| Cut out width:    | mm | Luminaire width:    | 225 mm | Net. weight:  | Appr. 4,00 kg |
| Cut out diameter: | mm | Luminaire depth:    | mm     |               |               |
|                   |    | Luminaire height:   | 129 mm |               |               |
|                   |    | Luminaire diameter: | mm     |               |               |

### Light distribution curve

### Spare parts

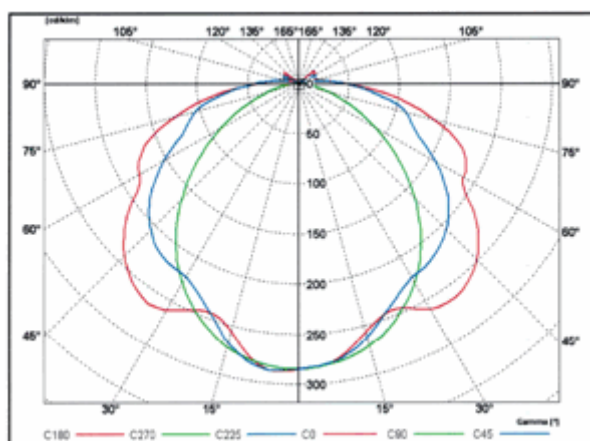

Item-Nr.

Item

9840125000 Clamps cpl.; 6 pcs.  
 9840039200 Diffuser; PC clear  
 9840285200 LED-cover cpl.; PC opal; for 1445 - 2200; 1 pc.

The copying, distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent utility model or ornamental design registration.

Technical modifications reserved without prior notice

Documentation Rev. . 00