

## CEILING BRACKET RTF-10



Ceiling brackets RTF are used to mount threaded rods GT to ceiling.



The HST product differs in appearance from the PG and HDG products.

CODE	PRODUCT x = stock product	WGT. kg / pc	LOADING max. kg	PACKAGE
1449484	x RTF-10 PG	0.14	250	10 PCE


PG	Manufactured of hot-dip galvanized steel in accordance with standard EN 10346 : C1-C2			
----	---	--	--	--

CODE	PRODUCT x = stock product	WGT. kg / pc	LOADING max. kg	PACKAGE
1449652	x RTF-10 HDG	0.15	250	10 PCE

HDG	Hot-dip galvanized after manufacturing in accordance with standard EN ISO 1461 : C1-C4			
-----	--	--	--	--

CODE	PRODUCT x = stock product	WGT. kg / pc	LOADING max. kg	PACKAGE
1430305	HST RTF-10	0.12	250	10 PCE

HST	Acid-proof steel : C1-CX			
-----	--------------------------	--	--	--

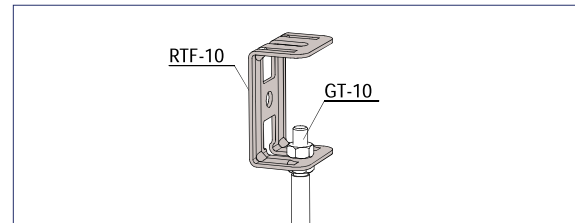

Ceiling bracket RTF-10 is attached to threaded rod GT-10 with nuts MU M10.

## CEILING BRACKET RTF-16



Ceiling brackets RTF are used to mount threaded rods GT to ceiling.




CODE	PRODUCT x = stock product	WGT. kg / pc	LOADING max. kg	PACKAGE
1449653	x RTF-16 HDG	0.23	400	10 PCE

HDG	Hot-dip galvanized after manufacturing in accordance with standard EN ISO 1461 : C1-C4			
-----	--	--	--	--

CODE	PRODUCT x = stock product	WGT. kg / pc	LOADING max. kg	PACKAGE
1430306	HST RTF-16	0.23	400	10 PCE

HST	Acid-proof steel : C1-CX			
-----	--------------------------	--	--	--

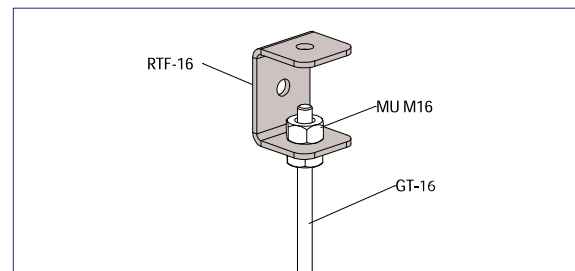

Ceiling bracket RTF-16 is attached to threaded rod GT-10 or GT-16 and nuts MU M10 or MU M16, depending on the orientation of the ceiling bracket.