
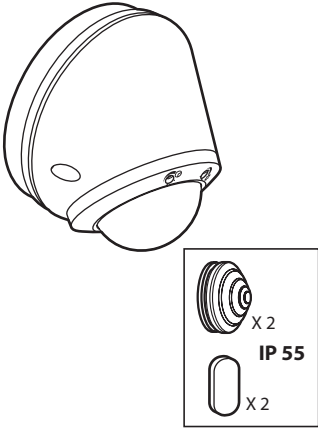








X 2
IP 55
X 2








	• 240 V~ • 240 B~ • 240 Volt		• Max. • Máx. • Макс. • Maks. • Maksimum • 최대
	• 50 / 60 Hz • 50 / 60 Гц		
	• 1 x 2,5 mm² – 2x1,5mm² • 1 x 2,5 mm² – 2x1,5mm²		
	• -20°C / +45°C		• Min. • Mín. • Мин. • Min. • Minimum • 최소
	• PIR • IV • IR • Passive Infra Red (PIR) • PIR (인체감지)		• 8 m • 8 m • 8 meter

										
										
• 230 V~ • 230 B~ • 230 Volt	• 1000 W • 1000 Br	• 4,3 A	• 500 VA • 500 BA	• 2,1 A	• 5 x (2x36 W) • 5 x (2x36 Br)	• 2,1 A	• 250 VA • 250 BA	• 1,1 A	• 500 VA • 500 BA	• 2,1 A

										
										
• 230 V~ • 230 B~ • 230 Volt	• 5 x (2x36 W) • 5 x (2x36 Br)	• 2,1 A	• 250 W • 250 Br	• 1,1 A	• 250 VA • 250 BA	• 1,1 A	• 250 VA • 250 BA	• 1,1 A	• 250 W • 250 Br	• 1,1 A

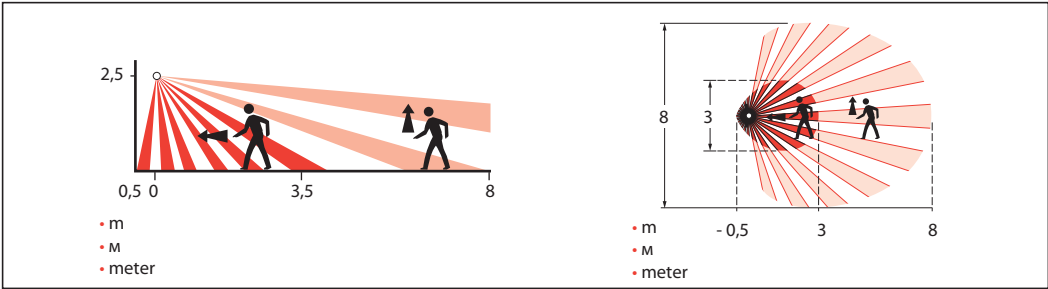

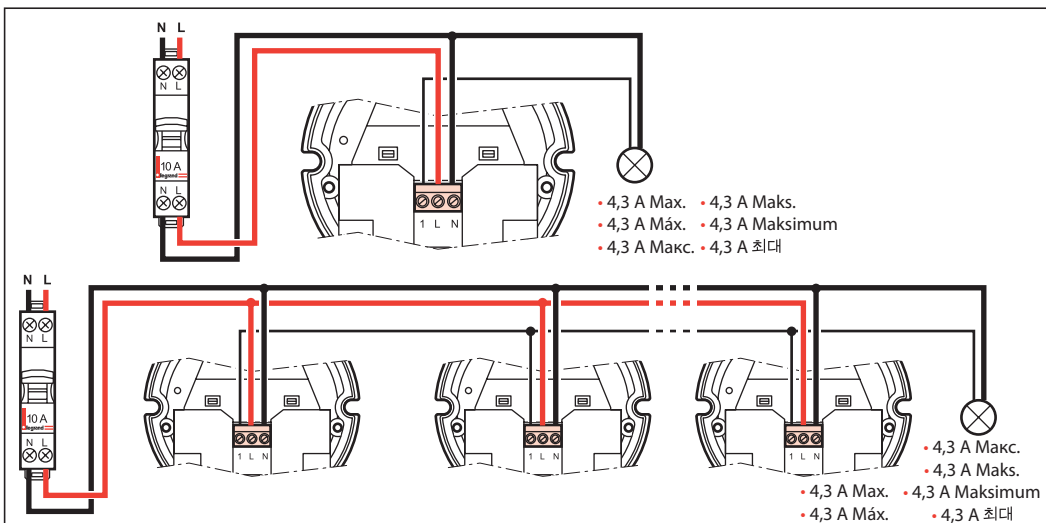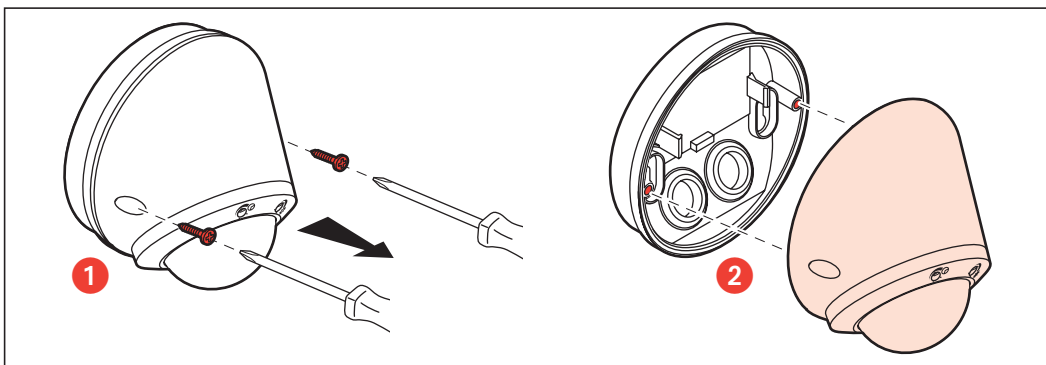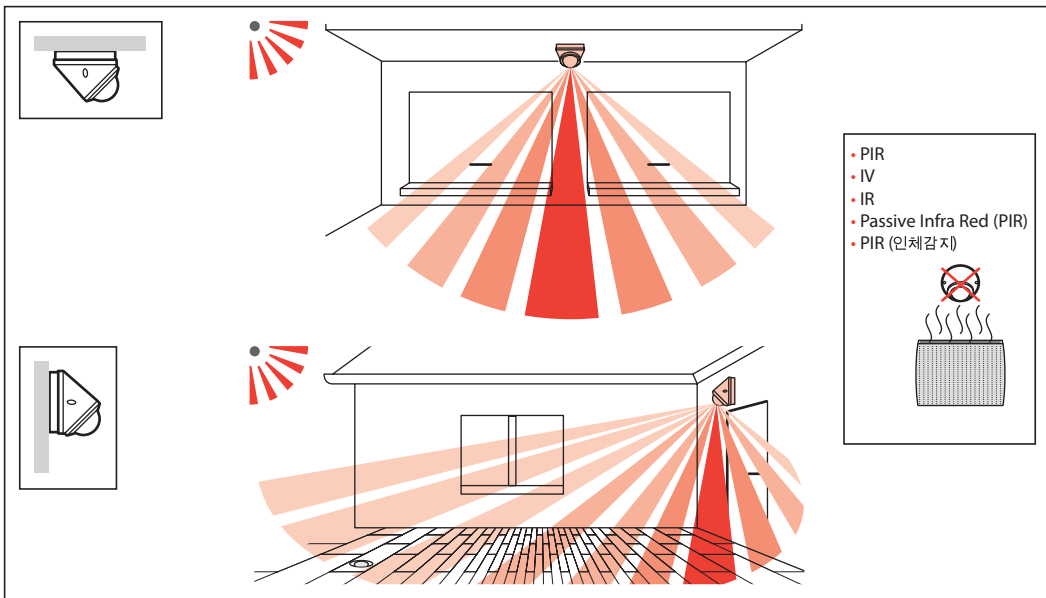

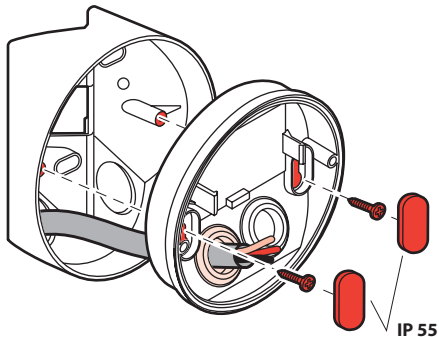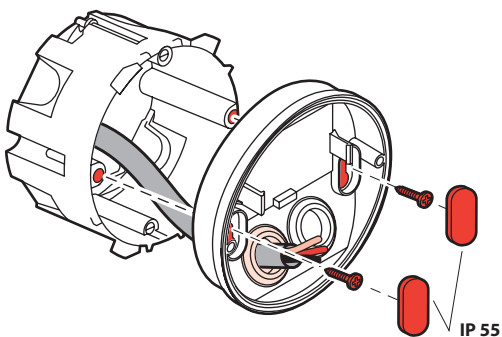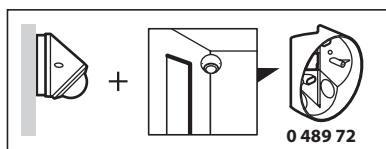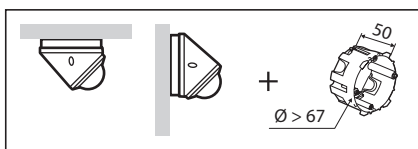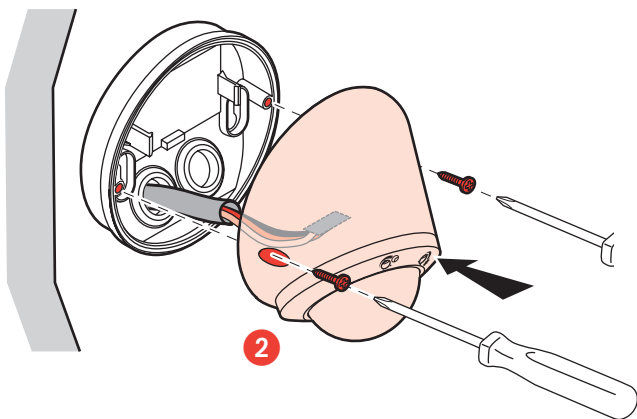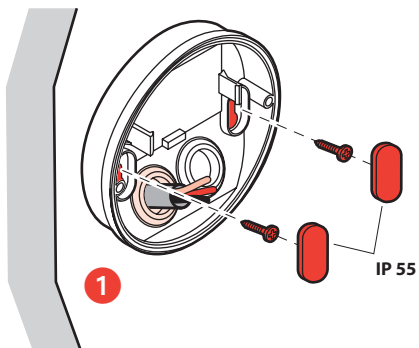




• Mode Auto
• Modo Auto

• Режим авто
• Tryb Auto

• Mod oto
• Mód Auto

• الوضع -اتوماتيكي
• Mod Auto

• 모드 자동





www.legrandoc.com

- Potentiomètre de luminosité
- Regeling lichtsterkte
- Daylight setpoint
- Helligkeitseinstellung
- Regulador de luz
- Ajuste da sensibilidade luminosa
- Ρύθμιση φωτεινότητας
- Потенциометр регулировки порога освещенности
- Ustawienie progu oświetlenia
- Gün ışığı ayarı
- Fényerősség beállító
- Pengaturan cahaya
- Nastavenie úrovne osvetlenia pre detekciu
- Nastavení úrovně osvětlení pro detekci
- مستوى الضبط (نقطة مرجعية ل ضوء النهار)
- Setare prag luminos
- 조도 설정

☀	• 10 - 1275 lux - Max. • 10 - 1275 lux - Máx. • 10 - 1275 лк - Макс. • 10 - 1275 lux - Maks. • 10 - 1275 lüks - Maks. • Max. 10 - 1275 lux • 10 - 1275 lux - Maksimum • 10 - 1275 lux - 최대
🕒	• 10 sec - 10 min • 10 seg - 10 min • 10 c - 10 мин • 10 sek. - 10 min. • 10 sn. - 10 dk • 10 detik - 10 menit • من 10 ثانية الى 10 دقائق • 10 초 - 10 분

☀	• 8 m • 8 m • 8 meter
• Mode	
• Modo	
• Режим	
• Tryb	
• Mód	
• الوضع -اتوماتيكي	
• Mod	
• 모드	
	• Auto • авто • 자동

- Potentiomètre de temporisation
- Regeling tijdsvertraging
- Timedelay
- Zeitverzögerung
- temporizador
- Ajuste da temporização
- Ρύθμιση του χρόνου
- Потенциометр регулировки выдержки времени
- Ustawienie zwłoki czasowej
- Gecikme süresi
- Időzítés beállító
- Pengaturan waktu jeda
- Nastavenie doby zopnutia
- Nastavení doby sepnutí
- مدة الانتظار -التأخير
- Setare temporizare
- 지연 시간

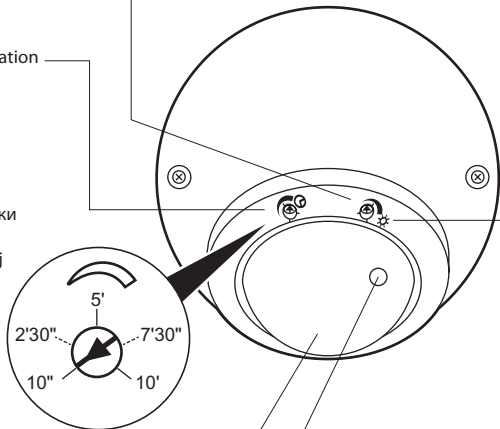

- 10 lux - 1275 lux
- 10 лк - 1275 лк
- 10 lüks - 1275 lüks

- Max : Mode Test
- Max: Test Modus
- Max: Test Mode
- Max: Testmodus
- máx modo test
- Max : Modo Teste
- Макс.: режим проверки
- Maks: Tryb Testowy
- Maks: Test Modu
- Max: Teszt mód
- Maks: Mode Tes
- الحد الأقصى: وضع الاختبار
- Max: Mod Test
- 최대: 테스트 모드

- Capteur PIR
- Passieve infrarood sensor
- PIR sensor
- PIR-Sensor
- sensor PIR
- Lente de deteção IV
- Αιχμηστής PIR
- Датчик PIR
- Czujka PIR
- PIR sensör
- Sensor Passive Infra Red (PIR)
- PIR snímač
- PIR snímač
- حساس PIR
- Senzor PIR
- PIR (안체감지) 센서

- Cellule de luminosité
- Lichtsterkte sensor
- Daylight sensor
- Helligkeitssensor
- célula fotoelétrica
- Sensor de luminosidade
- Φωτοκύτταρο
- Датчик освещенности
- Czujka oświetlenia
- Gün ışığı sensörü
- Fényérzékelő
- Sensor cahaya
- Snímač intenzity denného osvetlenia
- Snímač intenzity denního osvětlení
- حساس ضوء النهار
- Senzor lumina
- 조도 센서