

## Thin-walled shrinkable tubes in boxes – shrink ratio 2 : 1



### Application

- Universal application for insulation, marking, bundling and protection of cores

### Eigenschaften

- UV-resistant
- High electrical resistance
- Resistant against chemical influences
- Flame-resistant (except transparent)
- Easy to print
- Lead- and cadmium-free
- Flexible
- Temperature range:  $-55\text{ }^{\circ}\text{C}$  up to  $+135\text{ }^{\circ}\text{C}$
- Tested according to UL224, SAE-AMS-DTL-23053/5 Class 1 (colours), Class 2 (transparent) MIL-23053/CSA C 22.22/DEF-STAN 59-97 Class 3
- Convenient box
- Partial lengths on rolls possible


## Thin-walled shrinkable tubes in boxes – shrink ratio 2 : 1

Application $\varnothing$ from – up to mm	Shrinking D $\varnothing$ D* mm	Wall thickness W* mm	Content m	Article Number	Type
1,4 – 0,9	1,6 – 0,8	0,45	15	104 100.	<b>SSB 1,6 – 0,8</b>
1,8 – 1,4	2,4 – 1,2	0,50	15	104 200.	<b>SSB 2,4 – 1,2</b>
2,7 – 1,8	3,2 – 1,6	0,50	15	104 250.	<b>SSB 3,2 – 1,6</b>
3,6 – 2,6	4,8 – 2,4	0,50	10	104 300.	<b>SSB 4,8 – 2,4</b>
5,7 – 3,6	6,4 – 3,2	0,65	10	104 400.	<b>SSB 6,4 – 3,2</b>
8,5 – 5,7	9,5 – 4,8	0,65	10	104 500.	<b>SSB 9,5 – 4,8</b>
11,4 – 8,5	12,7 – 6,4	0,65	8	104 600.	<b>SSB 12,7 – 6,4</b>
18,0 – 11,4	19,0 – 9,5	0,75	7	104 700.	<b>SSB 19,0 – 9,5</b>
23,0 – 18,0	25,4 – 12,7	0,90	4	104 800.	<b>SSB 25,4 – 12,7</b>

### Specify article number with colour code:

black = .1                      red = .4  
blue = .2                      transparent = .12

Other colours on request.

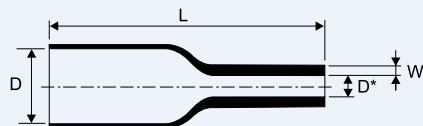

## Thin-walled shrinkable tubes in boxes – shrink ratio 2 : 1

### Colour: green/yellow

Application $\varnothing$ from – up to mm	Shrinking D $\varnothing$ D* mm	Wall thickness W* mm	Content m	Article Number	Type
3,6 – 2,6	4,8 – 2,4	0,50	10	104 300.11	<b>SSB 4,8 – 2,4</b>
5,7 – 3,6	6,4 – 3,2	0,65	10	104 400.11	<b>SSB 6,4 – 3,2</b>
8,5 – 5,7	9,5 – 4,8	0,65	10	104 500.11	<b>SSB 9,5 – 4,8</b>
11,4 – 8,5	12,7 – 6,4	0,65	8	104 600.11	<b>SSB 12,7 – 6,4</b>
18,0 – 11,4	19,0 – 9,5	0,75	7	104 700.11	<b>SSB 19,0 – 9,5</b>
23,0 – 18,0	25,4 – 12,7	0,90	4	104 800.11	<b>SSB 25,4 – 12,7</b>

Technical advantages according to type S1