



## Mosaic™

### Controls for opening

Cat. No(s) : 0 770 25/26/28 - 0 791 26 - 0 792 25/26 /28



0 770 25/26  
0 791 26  
0 792 25/26



0 770 28  
0 792 28


#### 1. USE

Control mechanisms for roller shutters, blinds and awnings.

#### 2. RANGE

|                                                                  | Blanc    | Anthracite | Aluminium |
|------------------------------------------------------------------|----------|------------|-----------|
| Pushbutton for roller shutters / blinds / awnings                | 0 770 25 | -          | 0 792 25  |
| Switch for roller shutters / blinds / awnings                    | 0 770 26 | 0 791 26   | 0 792 26  |
| Pushbutton direct control for roller shutters / blinds / awnings | 0 770 28 | -          | 0 792 28  |

#### 3. OVERALL DIMENSIONS (mm)

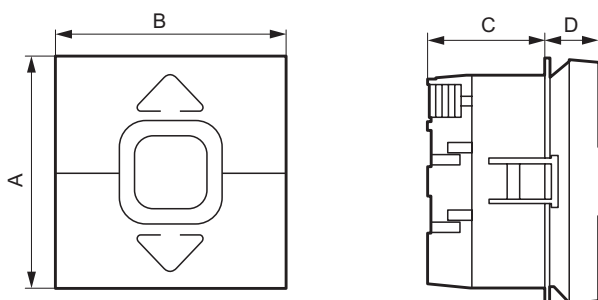


| A  | B  | C  | D  |
|----|----|----|----|
| 45 | 45 | 23 | 12 |


#### 4. CONNECTION

Terminal type: automatic  
Stripping: 13 mm  
Terminal capacity: 2 x 2.5 mm<sup>2</sup>


##### ■ 4.1 Pushbutton wiring (Cat. No. 0 770 25 - 0 792 25)

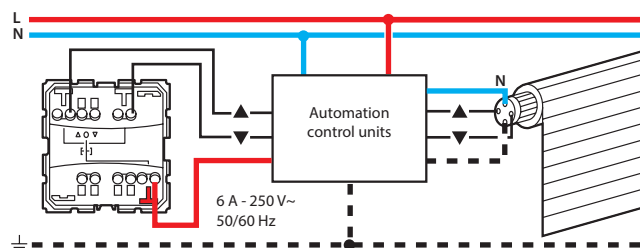

##### ■ 4.2 Switch wiring (Cat. No. 0 770 26 - 0 791 26 - 0 792 26)

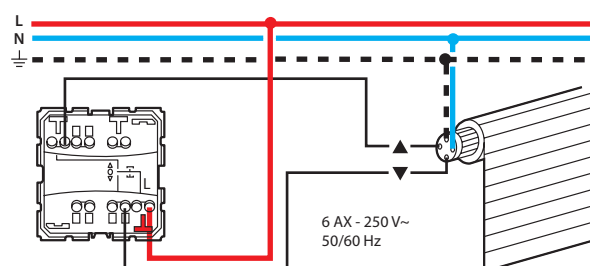


##### ■ 4.3 Pushbutton wiring (Cat. No. 0 770 28 - 0 792 28)

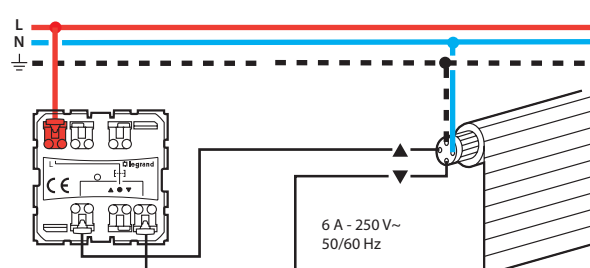


#### 4. CONNECTION (continued)

##### ■ 4.3 Pushbutton wiring (Cat. No. 0 770 28 - 0 792 28) with relays

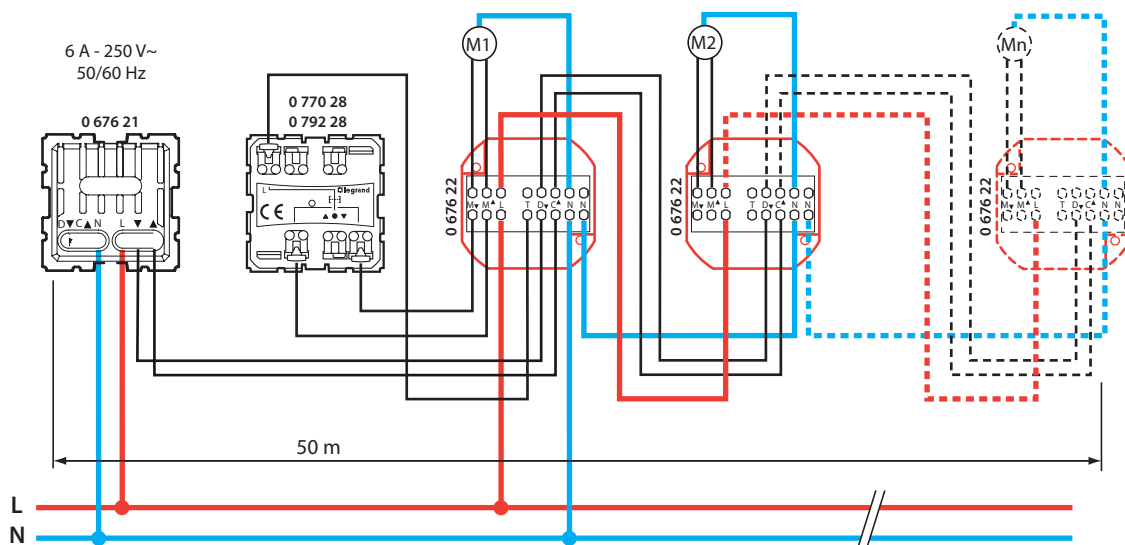

#### 6. OPERATION

Cat. Nos. 0 770 25 - 0 792 25: double pushbutton for controlling one or more opening motors via automation control units (closing mechanism).  
Cat. Nos. 0 770 26 - 0 791 26 - 0 792 26: double switch for direct control of opening drives (fixed position mechanism).  
Cat. Nos. 0 770 28 - 0 792 28: double pushbutton for relay control (closing mechanism) of motor opening (without STOP).

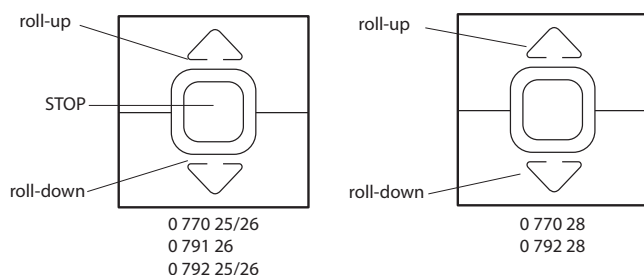

#### 7. TECHNICAL DATA

##### ■ 7.1 Mechanical characteristics

Impact tests: IK 04  
Penetration by solid/liquids bodies: IP 41 (C15-1000)

##### ■ 7.2 Material characteristics

Rocker: ABS (RAL 9003)  
ABS Aluminium paint  
ABS Anthracite  
Base: Polycarbonate  
Rocker support: Polycarbonate

##### ■ 7.3 Electrical characteristics

Self-extinguishing: 650° C / 30 s  
Voltage: 250 V~  
Current: 0 770 26 - 0 791 26 - 0 792 26 : 6 AX  
0 770 25/28 - 0 792 25/28 : 6 A  
Max. controlled power: 500 W

##### ■ 7.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C  
Operating temperatures: - 5° C to + 35° C

#### 8. CLEANING

Surface cleaning with a cloth.  
Do not use: acetone, tar remover, trichloroethylene.

##### ■ 8.1 Resistance to cleaning agents

Resistance to the following agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

##### ■ 8.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Anios, Surfanios, Bactylisine, Diluted hydrogen peroxide (35%).

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

#### 9. CONFORMITY - APPROVALS

Conform with standards of installation and manufacturing.  
Refer to e.catalogue.