


Supply busbars, entry terminals

"standard" distribution

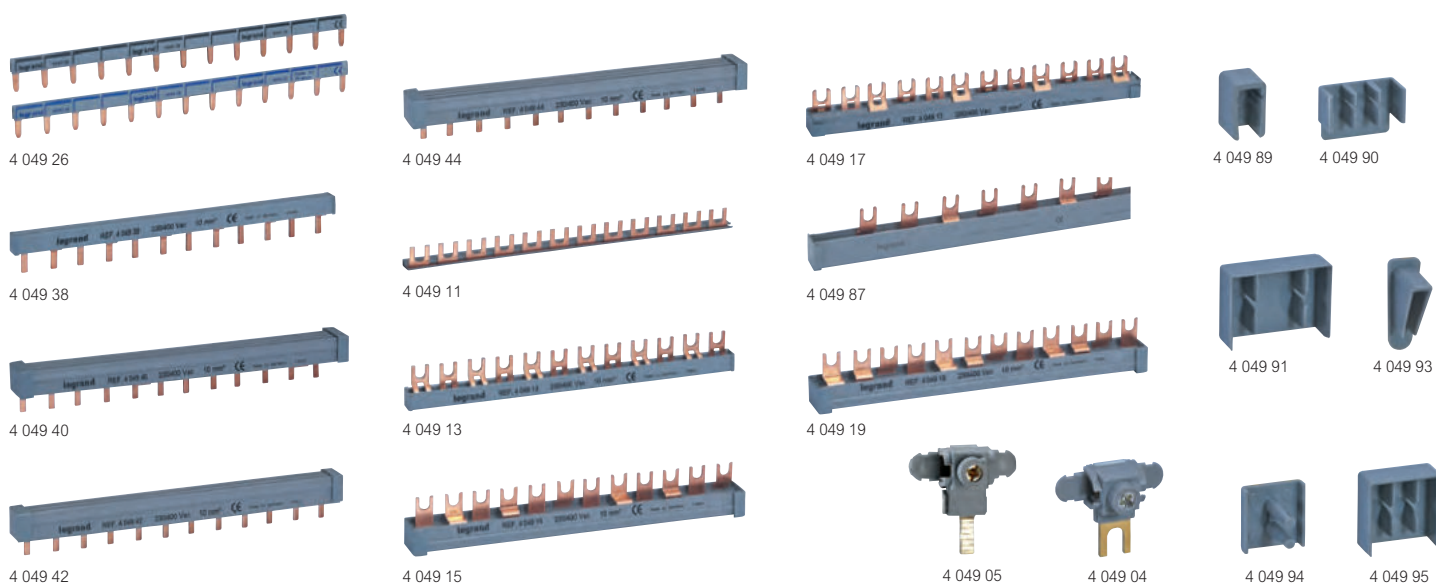

Selection of protections for supply busbars p. 298

Pack	Cat.Nos	Prong-type supply busbars	
		Universal single pole + neutral	
		Reversible: blue for neutral, black for live	
		Length	Max. number of devices connected
20	4 049 26	1 row	13
20	4 049 28	1 row	18
10	4 049 37	Meter	57
10	4 049 33	Meter	37
		Single pole for auxiliary	
10	4 049 38 ¹	1 row	6
10	4 049 39	Meter	28
		Double pole	
10	4 049 40 ¹	1 row	6
10	4 049 66 ¹	1 row	9
10	4 049 41	Meter	28
		Double pole balanced on 3 phases	
10	4 049 42 ¹	1 row	4
10	4 049 43	Meter	19
		Three pole	
10	4 049 34	Meter	16
		Three pole for auxiliary	
10	4 049 44 ¹	1 row	3
10	4 049 45	Meter	14

Pack	Cat.Nos	Fork-type supply busbars	
		Single pole	
		Length	Max. number of devices connected
10	4 049 11 ¹	1 row	12
10	4 049 12	Meter	57
10	4 049 13 ¹	1 row	6
10	4 049 14	Meter	28
		Double pole	
10	4 049 15 ¹	1 row	6
10	4 049 67 ¹	1 row	9
10	4 049 16	Meter	28

Pack	Cat.Nos	Fork-type supply busbars (continued)	
		Three pole	
10	4 049 17 ¹	1 row	4
10	4 049 18	Meter	19
10	4 049 87 ¹	1 row	12
10	4 049 10	Meter	16
		Three pole for 1.5 module/pole MCBs	
		Three pole for auxiliary	
10	4 049 19 ¹	1 row	3
10	4 049 20	Meter	14
		Four pole	
20	4 049 88	Protection	
		Protection of prongs	
		12 modules	
		Can be cut to length	
		Protection of prong-type and fork-type supply busbar ends	
40	4 049 89	For single pole/single pole + neutral supply busbars Cat.Nos 4 049 26/28/33/37	
20	4 049 90	For three pole supply busbars Cat.Nos 4 049 34/42/43	
20	4 049 91	For four-pole supply busbars Cat.Nos 4 049 40/41/44/45/66/67	
20	4 049 94	For double pole supply busbars Cat.Nos 4 049 14/38/39	
20	4 049 95	For three-pole supply busbars Cat.Nos 4 049 17/18/87	

Pack	Cat.Nos	Entry terminals	
20	4 049 05	For universal single pole + neutral or single pole supply busbars	
10	4 049 04	Cross section: 4 to 25 mm ² - IP 2X	
20	4 049 06	For fork-type supply busbars	
		Cross section: 4 to 25 mm ² - IP 2X	
20	4 049 06	For all supply busbars	
		Cross section: 6 to 35 mm ²	

1: Filled with end protection