



Mosaic™

Cat. No(s): 0 775 90/92 - 0 793 90/92

USB Type-A + USB Type-C charger USB Type-C charger



0 775 92 - 0 793 92



0 775 90 - 0 793 90


1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks.

2. RANGE

USB chargers 5 V \pm / 3.0 A	White	Aluminium
1 USB Type-A + 1 USB Type-C (1 output Type-A - 1 output Type-C)	0 775 92	0 793 92
1 USB Type-C (2 outputs Type-C)	0 775 90	0 793 90

3. DIMENSIONS (mm)

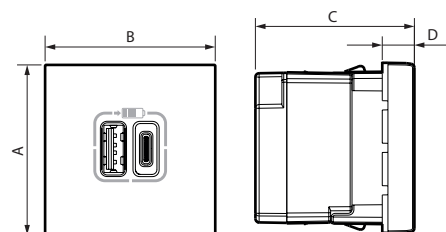

A	B	C	D
45	45	42	8.5

4. CONNECTION

Type of terminals: with screws
Terminal capacity: 2 x 2.5 mm²
Stripping length: 6 mm
Screwdriver: flat 3.5 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04

Penetration by solid bodies/liquid: IP 40

■ 5.2 Material characteristics

Base: PC

Cover-plate: PC

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.

+ 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Climatic characteristics

Storage temperature: - 20° C to + 70° C

Operating temperature: 0° C to + 45° C

■ 5.4 Electrical characteristics

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Nominal input voltage	100 - 240 V~
Nominal input frequency	50-60 Hz
Power consumption	15 W
Maximum input current	300 mA
Maximum power consumption in standby	0.075 W
Power average efficiency	80.3 %
Nominal output voltage	5 V \pm
Maximum output current Type-A + Type-C	3 A shared on A and C output
Maximum output current Type-C	3 A
No-load power consumption class and average efficiency level: level VI*	
Protection class	II - Low voltage

*Nota: European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies.

Note : To optimize the charging time of your device, ensure turn it off during the charging phase.

USB Type-A + USB Type-C charger

USB Type-C charger

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.

Refer to e-catalogue.